

SUPERCritical EXTRACTION

Jonin T.M.

Nestle, Switzerland

Adjadj L.P.

Laboratorium für Technische Chemie/LTC, Switzerland

Rizvi S.S.

Food Science Department, Cornell University, USA

Keywords: Supercritical, carbon dioxide, extraction, solubility, process examples, food applications

Contents

1. Introduction
 2. Concepts of Supercritical Fluids
 3. Solubility Measurement Techniques
 - 3.1. Dynamic Systems for the Determination of Solubility in Supercritical Fluids
 - 3.2. Static Systems for the Determination of Solubility in Supercritical Fluids
 - 3.3. Dynamic Systems vs. Static Systems
 4. Solubility Measurements
 5. Applications of Supercritical Fluid Extraction
 - 5.1. Decaffeination
 - 5.1.1. Decaffeination of Coffee
 - 5.1.2. Cocoa Bean Extraction
 - 5.2. Hop Extraction
 - 5.3. Spice Extraction
 - 5.4. Fractionation
 - 5.5. Analysis of Wine Aroma
 6. Other Applications of Supercritical Fluids
 - 6.1. Supercritical Fluid Extrusion (SCFX)
 - 6.2. Supercritical Water Oxidation
- Glossary
Bibliography
Biographical Sketches

Summary

Under atmospheric conditions, materials can be found in three different forms: *solid*, *liquid*, and *gaseous*. A fourth state, called *supercritical*, can be reached by tuning temperature and pressure above the critical point. The physical properties of supercritical fluids are intermediates between those of gases and liquids: high density, high diffusivity, low viscosity, and high solubilizing power. Such fluids can be referred to as *compressible liquids* or *dense gases*.

The tunable properties of supercritical fluids are used in the extraction of hops and

various spices, for decaffeination of coffee, tea, and cocoa bean, as well as for milk fat fractionation or the analysis of wine aroma. Some other types of processes such as extrusion or water treatment are also based on supercritical fluids.

Carbon dioxide is the substance most commonly used for supercritical processes because of its easy-to-reach critical temperature and pressure, its chemical stability, non-flammability, non-toxicity, low cost, stability under radioactive conditions, and the easy recovery of extracts.

1. Introduction

The unique solvent properties of supercritical fluids were first reported well over 100 years ago in 1879 by Hannay and Hogarth, who measured the solubility of several inorganic salts in supercritical ethanol. However, in the 1980s and 1990s supercritical fluids have been used in several industrial processes, including decaffeination of coffee and tea, extraction of hop flavor for the beer industry, and extraction of lipids and aromas from plant material. Other applications of supercritical fluids include their use as solvents for synthesis in supercritical environments or as solvents for supercritical chromatography.

2. Concepts of Supercritical Fluids

A fluid is considered supercritical if it exists at conditions above its critical pressure and temperature. These critical values correspond to conditions in which condensation into a liquid or evaporation into a gas is no longer possible. These values can be easily visualized in the pressure and temperature projection of a phase diagram (Figure 1).

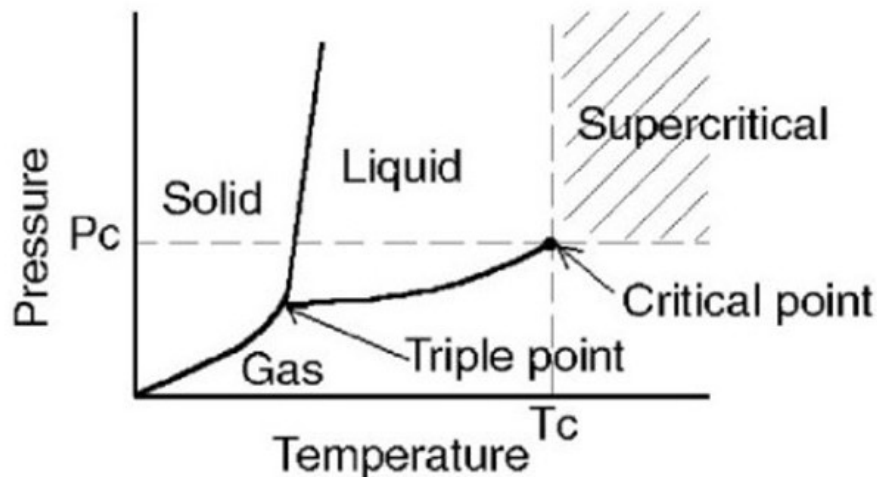


Figure 1. Typical pressure–temperature projection of a phase diagram for a pure material

The transition from a gas-liquid state to a supercritical form can be visualized by the disappearance of the meniscus between the two phases, as it becomes one phase.

Supercritical fluids are used because of the unique properties of such substances.

Supercritical fluids diffuse faster and have a lower viscosity compared to liquids. Table 1 shows the different physical properties of fluids in different states.

The dissolution power of a fluid is directly related to its overall solvation energy, which is determined by the sum of the solute–solvent interactions. As shown in Table 1, the density of supercritical fluids is about three orders of magnitude greater than that of gas; therefore, the dissolving power is increased for supercritical fluids, because as density increases more solute–solvent interactions will occur. Since supercritical fluids have great dissolving power, they are used in a number of ways for purification, extraction, fractionation, and recrystallization of a wide host of materials. In the future, new applications will probably be developed for supercritical fluids, in which case their use will likely become more common in new and existing industrial processes.

State of fluid	Density [g/cm ³]	Diffusivity [cm ² /sec]	Viscosity [g/cm*sec]
Gas P = 1 atm, T = 15-30°C	(0.6-2)*10 ⁻³	0.1-0.4	(1-3)*10 ⁻⁴
Liquid P = 1 atm, T = 15-30°C	0.6-1.6	(0.2-2)*10 ⁻⁵	(0.2-3)*10 ⁻²
Supercritical P = P _c , T = T _c P = 4P _c , T = T _c	0.2-0.5 0.4-0.9	0.7*10 ⁻³ 0.2*10 ⁻³	(1-3)*10 ⁻⁴ (3-9)*10 ⁻⁴

Table 1. Order-of-magnitude comparison of the properties of fluids as a function of their state

A list of selected supercritical fluids is given in Table 2. The supercritical fluids most commonly used are carbon dioxide, ethane, ethene, propane, ammonia, and water. However, carbon dioxide is preferred because of its convenient critical temperature, cost, chemical stability, non-flammability, stability in radioactive applications, and non-toxicity. Disposal of carbon dioxide is more environmentally friendly than for most other organic solvents typically used in extraction processes. It can be obtained in large quantities as a byproduct of several reactions, such as fermentation, combustion, and ammonia synthesis.

Another advantage of using supercritical CO₂ is that once the extract returns to standard conditions of pressure and temperature, the CO₂ returns to a gas phase and the extracted product precipitates since it is no longer soluble in the gas. Therefore, there is no need for an additional separation step, as in the case of other solvents used in the food industry.

Substance	T _c [K]	P _c [MPa]	Critical density [g/cm ³]
Methane	190.6	4.60	0.162
Ethylene	282.4	5.03	0.218
Chlorotrifluoromethane	302.0	3.92	0.579
Carbon dioxide	304.2	7.38	0.468
Ethane	305.4	4.88	0.203
Propylene	365.0	4.62	0.233
Propane	369.8	4.24	0.217

Ammonia	405.6	11.30	0.235
Diethyl ether	467.7	3.64	0.265
n-Pentane	469.6	3.37	0.237
Acetone	508.1	4.70	0.278
Methanol	512.6	8.09	0.272
Benzene	562.1	4.89	0.302
Toluene	591.7	4.11	0.292
Pyridine	620.0	5.63	0.312
Water	647.3	22.00	0.322
Xenon	289.7	5.84	1.113

Table 2. Selected supercritical fluids and their supercritical properties

Applications using these fluids include: extraction of carbonaceous material using supercritical ammonia; removal of polychlorinated dibenzodioxins, polychlorinated dibenzofurans, and stickies from fibers using supercritical propane; and reacting aromatic polyester with supercritical methanol to provide dimethyl aromatic dihydric carboxylic acid and dihydric alcohol.

In order to increase the solubility of polar compounds in a non-polar supercritical fluid a co-solvent, or entrainer, can be used. This increases the polarity of the supercritical fluid and therefore increases the interaction between the solute and the solvent. Typical co-solvents are generally used in proportions from 1 to 10 percent. Selected co-solvents include acetone, hexane, octane, methanol, ethanol, 1-propanol, and 2-propanol.

The effects of non-polar co-solvents for solubility enhancement in supercritical CO₂ have been studied. Since carbon dioxide has low polarizability, the solubility of hydrocarbons is limited, but by adding small amounts of alkane co-solvent it was possible to enhance their solubility significantly. Among the co-solvents tested were pentane, octane, and undecane. Using octane, investigators were able to increase the phenanthrene solubility up to five times.

Solubility values can also be predicted using equations of state. For a system containing more than two components, mixing rules are introduced that take into account the interactions between the different components. A good review of the fundamental principles of supercritical fluids was written in 1986.

Modeling of lipid solubility has been studied in numerous publications. One research team described a model to compute the solubility values of fatty acids and triglycerides, either pure or in mixture. Three fatty acids and their corresponding triglycerides were used: lauric acid, myristic acid, palmitic acid, trilaurin, trimyristin, and tripalmitin.

3. Solubility Measurement Techniques

In order to set up a process for supercritical extraction of a raw material the first step is to measure its solubility in supercritical fluid. There are two commonly used approaches: using a dynamic or flow-through system or using a static or recirculation system.

-
-
-

TO ACCESS ALL THE 17 PAGES OF THIS CHAPTER,
Visit: <http://www.eolss.net/Eolss-sampleAllChapter.aspx>

Bibliography

Bamberger T., Erickson J.C., Cooney C.L., and Kumar S.K. (1988). Measurement and model prediction of solubilities of pure fatty-acids, pure triglycerides, and mixtures of triglycerides in supercritical carbon dioxide. *Journal of Chemical Engineering. Data* **33**, 327-333. [Measurement and model prediction of solubilities of pure fatty acids, pure triglycerides, and mixtures of triglycerides in supercritical carbon dioxide.]

Bhaskar A.R., Rizvi S.S.H., Bertoli C., Fay L.B., and Hug B. (1998). A comparison of physical and chemical properties of milk fat fractions obtained by two processing technologies. *Journal of American Oil Chemists' Society*. **75**, 1249. [Milk fat fractions from supercritical carbon dioxide (SC-CO₂) extraction were compared with commercial melt crystallization (MC) fractions for their physical and chemical properties.]

Blanch G.P., Reglero G., and Herraiz M. (1995). Analysis of wine aroma by off-line and on-line supercritical fluid extraction-gas chromatography. *Journal of Agricultural and Food Chemistry*. **43**, 1251. [The applicability of supercritical fluid extraction (SFE) and gas chromatography (GC) for analyzing wine aroma is evaluated by considering three different approaches.]

Blaney C.A. and Hossain S.U. (1991). Method for removing polychlorinated dibenzodioxins and polychlorinated dibenzofurans and stickies from secondary fibers using supercritical propane solvent extraction *US patent number 5074958*.

Chylinski K. and Gregorowicz J. (1998). Solubilities of 1-propanol and 1,2-propanediol in supercritical carbon dioxide. New analytical procedure and measurements. *Fluid Phase Equilibria* **143**, 163. [A flow-type apparatus and a new analytical procedure for solubility measurements of low volatile substances in compressed cases were developed. The equipment and the procedure were tested by measurements of solubility of decane and naphthalene in compressed carbon dioxide.]

Chylinski K. and Gregorowicz J. (1998). Solubilities of 1-hexanol, or 1,2-hexanediol, or 2-hydroxypropanoic acid ethyl ester, or 2-hydroxyhexanoic acid ethyl ester) in supercritical CO₂. *Journal of Chemical Thermodynamics* **30**, 1131. [Solubilities of 1-hexanol, or 1,2-hexanediol, or 2-hydroxypropanoic acid ethyl ester, or 2-hydroxyhexanoic acid ethyl ester in supercritical CO₂ have been measured at T=(311, 318, and 323, or 328)K in the pressure range 1–8 MPa.]

Dobbs J.M., Wong J.M., and Johnston K.P. (1986). Nonpolar cosolvents for solubility enhancement in supercritical fluid carbon dioxide. *Journal of Chemical and Engineering Data* **31**(3), 303-308. [Nonpolar co-solvents for solubility enhancement in supercritical fluid carbon dioxide.]

Haberstroh C. and Morris C.E., Eds. (1991). *Advances in Applied Biotechnology Series*, Vol. 12. Fat and Cholesterol Reduced Foods. Technologies and Strategies. (Presented at Conference on Fat and Cholesterol Reduced Foods, March 1990, New Orleans, LA). 308 p. [Topics on foods reduced in fat and cholesterol]

Iwai Y., Fukuda T., Koga Y., and Arai Y. (1991). Solubilities of myristic acid, palmitic acid, and cetyl alcohol in supercritical carbon dioxide at 35 C. *Journal of Chemical Engineering Data* **36**(4), 430-432. [In this article, solubilities of myristic acid (tetradecanoic acid), palmitic acid (hexadecanoic acid), and cetyl alc. (hexadecanol) in supercritical carbon dioxide are measured with a flow-type apparatus. The logarithm of the enhancement factor was plotted against the density of carbon dioxide, and a good linear relationship was observed for each system.]

Joffe J., Schroeder G.M., and Zudkevitch D. (1970). Vapor-liquid equilibria with the Redlich-Kwong equation of state. *AIChE Journal* **16**(3), 496-498. [This article evaluates the dimensionless Redlich-Kwong parameters W_a and W_b of pure components from their pressure-volume-temperature data as a function of temperature by the equalization of the fugacity coefficients in the saturated vapor and saturated liquids. Parameters calculated by the fugacity equalization method are compared with those calculated from a previous method.]

Li S. and Hartland S. (1996). A new industrial process for extracting cocoa butter and xanthines with supercritical carbon dioxide. *Journal of American Oil Chemists' Society* **73**, 423. [This research explores the feasibility of extracting cocoa butter and xanthines (theobromine and caffeine) from cocoa beans with supercritical CO_2 .]

Maheshwari P., Nikolov Z.L., White T.M., and Hartel R. (1992). Solubility of fatty acids in supercritical carbon dioxide. *Journal of American Oil Chemists' Society* **69**, 1069. [The solubilities of lauric, linoleic, myristic, oleic, palmitic, and stearic acid in supercritical carbon dioxide (SC-CO_2) at different pressures and temperatures were measured.]

McHugh M.A., Seckner A.J., and Yogan T.J. (1984). High-pressure phase behavior of binary mixtures of octacosane and carbon dioxide. *Industrial and Engineering Chemistry Fundamentals*, **23**(4), 493-499. [The high-pressure fluid phase behavior of binary mixtures of octacosane and CO_2 was investigated using two experimental techniques. Phase diagram constructions are used qualitatively to explain the observed phase behavior, and to provide information on the expected phase behavior of the octacosane- CO_2 system at pressures higher than those investigated experimentally.]

Mohamed R.S., Neves G.B.M., and Kieckbusch T.G. (1998). Reduction in cholesterol and fractionation of butter oil using supercritical CO_2 with adsorption on alumina. *International Journal of Food Science & Technology* **33**, 445. [Cholesterol reduction, together with the fractionation of triglycerides in butter oil, was obtained using a combined supercritical CO_2 extraction/alumina adsorption process in a high-pressure apparatus allowing independent control of temperature and pressure.]

Nguyen U, Evans D.A., Berger D.J., and Calderon, J.A (1992). Process for the supercritical extraction and fractionation of spices. *US patent number 5120558*.

Ogasahara J., Ono M., Hamatani K., and Takahashi M. (1993). Method for production of hop extracts and hop extracts obtained thereby. *US patent number 5264236*.

Rizvi S.S.H., Benado A.L., Zollweg J.A., and Daniels J.A. (1986). Supercritical fluid extraction: fundamental principles and modeling methods. *Food Technology* **40**, 55. [A review and critical evaluation of the current understanding of supercritical fluid extraction (SFE) in unit processing operations for extracting food components.]

Rizvi S.S.H., Mulvaney S.J., and Sokhey A.S. (1995). Combined application of supercritical fluid and extrusion technology. *Trends in Food Science & Technology* **6** 232. [The supercritical fluid extrusion (SCFX) process has the potential for producing a range of puffed food products, such as ready-to-eat cereals, pasta, and confectionery products, with improved texture, color, and taste.]

Singh B. and Rizvi S.S.H. (1994). Design and economic analysis for continuous countercurrent processing of milk fat with supercritical carbon dioxide. *Journal of Dairy Science* **7**(6), 1731. [Fractionation of anhydrous milk fat using supercritical CO_2 provides various fractions of different physicochemical and functional properties that should enhance its utilization.]

Sokhey A.S., Rizvi S.S.H., and Mulvaney S.J. (1996). Application of supercritical fluid extrusion to cereal processing. *Cereal Food World* **41**, 29. [The supercritical fluid extrusion (SCFX) process developed at Cornell University uses supercritical carbon dioxide (SC-CO_2) as a blowing agent for producing solid foams, as opposed to the conventional moisture flash-off puffing process.]

Sunder S. and Miller R.N. (1985). Extraction of depolymerized carbonaceous material using supercritical ammonia. *US patent number 4539094*.

Biographical Sketches

L.P. Adjadj is currently a Ph.D. student at the Swiss Federal Institute of Technology Zurich (ETHZ). He is studying the applications of ultrasonic spectroscopy as a general method for particle sizing in

suspensions. He completed his D.E.S. (Superior Study Diploma) while in an exchange program between the University of Lausanne and the Food Science Department of Cornell University, Ithaca, NY. His work was focused on flavor carriage by supercritical CO₂ during extrusion. He holds a Chemical Engineering degree from the Swiss Federal Institute of Technology, Lausanne (EPFL). In his graduate thesis, he screened different ordered catalysts for steam reforming of methanol.

Thierry Jonin is currently working as a Project Manager at the Informatic Department in Nestlé, Switzerland. In 2000, he obtained a D.E.S. (Superior Study Diploma) from the University of Lausanne, Switzerland, for work completed in the field of supercritical CO₂, entitled “Solubility of methyl anthranilate in supercritical CO₂ as a function of pressure, temperature, and co-solvent,” under the supervision of Dr. S.H. Rizvi in the Food Science Department, Cornell University, Ithaca, NY, USA. Previously, he graduated in 1998 from the Chemistry Department at the University of Lausanne, Switzerland. His graduate thesis entitled “Study of moisture sorption isotherms of milk powders” was completed at the Nestlé Research Center, Vers-chez-les-Blancs, Switzerland.

Syed Rizvi is professor of Food Process Engineering in the Department of Food Science, Cornell University, Ithaca, NY. His laboratory is engaged in research on experimental and theoretical aspects of bioseparation processes, high pressure extrusion with supercritical fluids, physical and engineering properties of biomaterials, and novel food processing technologies. A major long-term goal is to develop new and improved unit operations for value-added processing of food and biomaterials. Derivative goals include new techniques for measurement and control of processes and properties for industrial applications. He has published over 100 technical papers, co-authored/edited six books, and holds eight patents.