

# NUMERICAL HEAT TRANSFER AND OTHER TRANSPORT PHENOMENA AND MODELING APPROACHES WITH RESPECT TO CHEMICAL REACTIONS IN FUEL CELLS

**Jinliang Yuan**

*Department of Energy Sciences, Faculty of Engineering, Lund University, Box 118, SE-22100 Lund, Sweden*

**Keywords:** Fuel cell, heat transfer, mass transfer, transport phenomena, electrode, electrolyte, membrane, anode, cathode, reaction, modeling, simulation, micro, macro, computation fluid dynamics, reforming, water phase change, multi-phase flow.

## Contents

1. Introduction
  2. Multi-phase Transport Processes and Reactions in Fuel Cells
    - 2.1. Fuel Cell Basics
    - 2.2. Reacting Mass Transfer in Fuel Cells
    - 2.3. Heat Transfer in Fuel Cells
    - 2.4. Other Transport Processes in Fuel Cells
    - 2.5. Water Management and Reforming Reactions in Fuel Cells
  3. Fuel Cell Modeling and Analysis Approaches
  4. Fuel Cell System Modeling
  5. Fuel Cell Stack Modeling
  6. CFD Models for Unit Fuel Cells
    - 6.1. Governing Equations with Chemical Reactions and Phase Change
    - 6.2. CFD Modeling Development
      - 6.2.1. Transport phenomena in fuel cell components
      - 6.2.2. Transport processes in unit cells
      - 6.2.3. Thermal management and heat transfer modeling
      - 6.2.4. PEMFC water management and two-phase flow modeling
      - 6.2.5. SOFC internal reforming reactions and modeling
    - 6.3. Other Critical Issues Relating to CFD Approach
  7. Microscopic Models for Fuel Cell Materials and Components
  8. Conclusions and Remarks
- Acknowledgement  
Glossary  
Bibliography  
Biographical Sketch

## Summary

There are various transport phenomena occurred in fuel cells, e.g., multi-component gas flow in cells and manifolds, heat and mass transfer of gas species in various functional components and sites. These physical processes are strongly affected by chemical/electrochemical reactions in nano-/micro-structured electrodes and electrolytes. For example, the electrochemical reactions generate or consume chemical species together with electric current production, which take place at the active sites (so-

called three-phase boundaries, or TPBs) in all kinds of fuel cells. Furthermore, potential water phase change and two-phase flow in proton exchange membrane fuel cells (PEMFCs) and internal reforming reactions of hydrocarbon fuels in solid oxide fuel cells (SOFCs) are strongly coupled with the electrochemical reactions and other transport processes to make the analysis and modeling even more difficult.

It is a common practice that, for modeling and analysis at the unit-cell and component level, typically CFD-based approaches might be suitable. Microscopic modeling approaches are required to analyze the various processes in, e.g., catalyst layers and active surfaces, while on the fuel cell stack and system levels, methods like lumped parameter analysis and overall heat/mass balances are more suitable. This paper outlines the various kinds of the approaches for modeling and numerical analysis, in terms of their characteristics, applicability and limitations.

## 1. Introduction

It is clear that extensive research activities have been carried out on fuel cells worldwide during last decades, with particular interest and focus on solid oxide fuel cell (SOFC) and proton exchange membrane fuel cell (PEMFC) systems. High performance, low cost and high reliability have been considered as the primary aspects and concerns for fuel cells to compete with well-developed fossil fuel power generation devices, such as internal combustion engines. However, the most research interests have focused on new material development, processing and manufacturing techniques for specific systems. As expected, currently available fuel cell materials appear to be adequate for near-term markets with higher cost entry points, and industries now focus on fuel cell design and optimization for better performance, improved durability, cost reduction and better cold-start characteristics, and system studies including hybrid or integrated fuel cell systems.

In these cases more attention should be placed on detailed analysis of transport processes in fuel cell functional materials, components and unit cells, even at micro- and nano-scale levels. This is because the majority of the physical and chemical processes take place in such small regions that are inaccessible to experimental measurement. Furthermore, water-phase change/multi-phase flow in PEMFCs and internal reforming reactions of hydrocarbon fuels in SOFCs are strongly coupled with the electrochemical reactions and other transport processes in the catalyst layers to make the physical phenomena extremely complicated. On the other hand, extensive research work is also needed for fuel cell stacks for the purpose to efficiently deliver required power output at the load operating voltage, and to achieve proper water/thermal management for an integrated power plant including various units.

Scientific models and simulations have been extremely important tools for many industrial applications. On the one hand, the micro-scale approaches, e.g., Density Functional Theory (DFT) and Molecular Dynamics (MD), and the meso-scale ones, e.g., Monte Carlo (MC) and Lattice-Boltzmann methods (LBM), take into account the effects of the multi-functional materials microscopic structures on the charge-transfer (electrochemical) reactions at active sites, the surface chemistry and the gas-phase chemistry based on elementary reaction kinetics (individual chemical reaction steps between intermediates) in the porous electrodes. On the other hand, there are well-

developed computational fluid dynamics (CFD) codes, which are widely applied to optimize design or investigate the structures of a flow at a macroscopic scale.

Similarly commercial codes are available for simulating integrated power system including several units. It is possible to use such simulation tools to make improvements to product design where physical design and testing are too expensive or not even possible.

This paper concerns the current status of fundamental models and analysis approaches for fuel cells and systems. It should be mentioned that this work is limited to PEMFCs and SOFCs. However, there are various models for other fuel cells, e.g., molten carbonate fuel cell (MCFC) in Gundermann *et al.* (2008) and Brouwer *et al.* (2005), and for fuel cell material and applications in Peighambardoust *et al.* (2010).

## 2. Multi-phase Transport Processes and Reactions in Fuel Cells

The fuel cell is not a new invention, since the electrochemical reaction was discovered already in 1838-39. The interest in fuel cells has been growing exponentially. Fuel cell systems are still an immature technology in early phases of development, as can be noted due to a lack of a dominant design, few commercial systems and a low market demand.

The creation of strategic niche markets and search for early market niches are of a vital importance for the further development. It is expected that mass production will start when a dominant design is found, and then production cost will significantly decrease due to the economy of scale.

The fuel cells can be examined from different points of view: as an electrochemical generator in a viewpoint of electrochemical reactions at continuum level, as a heat and mass exchanger in a perspective of fluid dynamics and transport phenomena, or as a chemical reactor in viewpoints of chemical reactions depending on fuel composition and heat effects associated with the electrochemical conversion (Andersson *et al.*, 2010).

### 2.1. Fuel Cell Basics

The major processes relevant to the fuel cell characteristics are similar in SOFCs and PEMFCs. These processes consist of the gas-phase species transport, electrochemical reactions, electronic and ionic transport, and heat transfer and temperature distribution.

A unit-cell structure of fuel cells, as shown in Figure 1, includes various components, such as fuel and oxidant ducts (or channels), electrolyte (polymer electrolyte membrane for PEMFCs), anode and cathode diffusion layers, catalyst layers in between them, as well as current inter-conductors/-connectors.

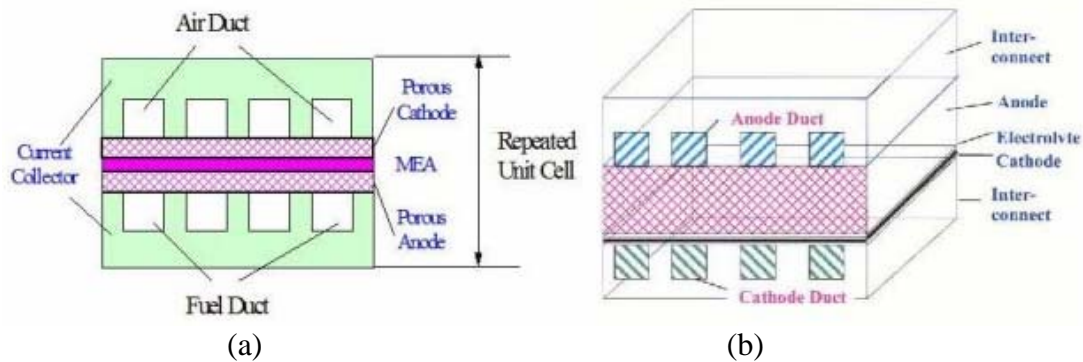


Figure 1. Schematic sketch of a unit cell for: a) PEMFC, and b) SOFC.

Unit cells are further organized together into stacks to supply the required electricity. In a fuel cell stack, the gas transport processes consist of the fuel and oxidant gas flows which are separated through the gas manifolds where no electrochemical reactions occur. The fuel and oxidant gases flow along cell ducts (or channels), where there is absorption of the reactants and injection of reactive products from/to the active sites. In the porous layers (electrodes), transport of the reactant gases occur towards triple-phase boundary (TPB, where electrode, electrolyte and gas meet) between the electrolyte and the electrodes, and the exhaust gases are rejected to the cell ducts (or channels) through the open pores. The exhaust gases from each cell are discharged through the gas output manifolds.

The electrolyte is non porous material, for instance,  $Y_2O_3$  stabilized  $ZrO_2$  (YSZ) in SOFCs. At an operating temperature (between 600-1000 °C for SOFCs and around 80 °C for PEMFCs), the electrolyte becomes non-conductive for electrons, but conductive to oxygen ions (in SOFCs) and hydrogen protons (in PEMFCs). The SOFC cathodes are mostly made from electronically conducting oxides or mixed electronically conducting and ion-conduction ceramics. The anode consists normally of nickel/yttria stabilized zirconia (Ni/YSZ) cermet. SOFCs can be designed with planar, tubular or monolithic structures. The planar design is normally more compact, compared to the tubular design, i.e., a higher specific volume power can be obtained. Tubular and planar SOFCs can be either electrolyte-, anode-, cathode- or metal-supported. An electrolyte-supported cell has thin anode and cathode (~50  $\mu m$ ), and the thickness of the electrolyte is more than 100  $\mu m$ . This design works preferably at temperatures around 1000 °C for SOFCs. In an electrode-supported SOFC either the anode (anode-supported) or the cathode (cathode-supported) is thick enough to serve as the supporting substrate for cell fabrication, normally between 0.3 and 1.5 mm. The electrolyte is in this configuration very thin, and the operating temperature can be reduced to an intermediate range.

For PEMFCs a polymer membrane is used in between anode and cathode. The membrane is made by substituting fluorine for hydrogen in long chain polymers and the process is called perfluorination. After this, a side chain is added, ending with sulfonic acid. The perfluorination of the polymer gives it the chemical resistance and mechanical strength while the addition of sulfonic acid gives it the property to carry the positive ions (hydrogen ions in this case). Therefore, the electrolyte in PEM fuel cells is sometimes also called proton exchange membranes.

Despite the differences in terms of materials, it is obvious that all the fuel cell electrolytes should essentially have the following properties, such as: they should be chemically resistant, and sufficiently strong so that they can be casted in very small thicknesses.

-  
-  
-

TO ACCESS ALL THE 53 PAGES OF THIS CHAPTER,  
Visit: <http://www.eolss.net/Eolss-sampleAllChapter.aspx>

### Bibliography

Aguiar, A., Adjiman, C.S. and Brandon, N.P. (2004), Anode-supported Intermediate Temperature Direct Internal Reforming Solid Fuel Cell. I: Model-based Steady-state Performance, *J. Power Sources*, **138**, 120-136. [This paper deals with mass and energy balances, and an electrochemical model that relates the fuel and air gas composition and temperature distribution when internal reforming reactions are involved].

Al-Baghdadi, M.A.R.S. (2005), Modeling of Proton Exchange Membrane Fuel Cell Performance Based on Semi-empirical Equations, *Renewable Energy*, **30**, 1587-1599. [The article presents an empirical model including process variations to estimate the performance of fuel cell stack without extensive calculations].

Andersson, D., Åberg, E., Yuan, J., Sundén, B. and Eborn, J. (2010), Dynamic Modeling of a Solid Oxide Fuel Cell System in Modelica, **FuelCell2010-33078**, *Proceedings of the ASME 2010 8<sup>th</sup> Int. Fuel Cell Sci., Engr. Tech. Conference*, New York, USA. [A SOFC stack model was presented to balance the gas flow and thermal energy related to other components, such as heat exchangers, fuel reformers, etc.].

Andersson, M., Yuan, J. and Sundén, B. (2010), Review on Modeling Development for Multi-scale Chemical-reactions-coupled transport phenomena in SOFCs, *Applied Energy*, **87**, 1461–1476. [This paper reviews various issues connecting to macro- and microscopic models for SOFCs. Integration approaches were outlined and discussed in terms of multi-scale modeling].

Baschuk, J.J. and Li, X. (2000), Modelling of Polymer Electrolyte Membrane Fuel Cells with Variable Degrees of Water Flooding, *J. Power Sources*, **86**, 181-196. [This paper involves the major physical and electrochemical processes occurring in the membrane electrolyte, cathode catalyst layer, electrode backing and flow channel, with a special attention on the effect of variable degree of water flooding in the cathode catalyst layer and/or cathode electrode backing region on the cell performance].

Baschuk, J.J. and Li, X. (2005), Modeling of PEM Fuel Cell Stacks with Hydraulic Network Approach, Book chapter in *Transport Phenomena in Fuel Cells*, Sundén, B. & Faghri, M. (eds), 283-315, WIT Press, UK. [A model of a PEM fuel cell stack is presented to predict the distributions of the pressure and mass flow rate for the fuel and oxidant streams in the stack based on a hydraulic network analysis.].

Beale, S.B. (2005), Numerical Model for Planar Solid Oxide Fuel Cells, Book Chapter in *Transport Phenomena in Fuel Cells*, Sundén, B. & Faghri, M. (eds), 43-82, WIT Press, UK. [The chapter outlines various modeling techniques for planar design SOFC unit cells and stacks].

Berning, T. and Djilali, N. (2003), Three-dimensional Computational Analysis of Transport Phenomena in a PEM Fuel Cell- a Parametric Study, *J. Power Sources*, **124**, 440-452. [The results of a parametric study conducted for a non-isotherm PEMFC model were presented. The effect of various operational parameters like the temperature and pressure was investigated in detail].

Biyikoğlu, A. (2005), Review of Proton Exchange Membrane Fuel Cell Models, *Int. J. Hydrogen Energy*, **30**, 1181-1212. [Various available models for PEMFCs were reviewed, together with the governing equations and assumptions employed].

Brouwer, J., Jabbari, F., Leal, E.M. and Orr, T. (2005), Analysis of a Molten Carbonate Fuel Cell: Numerical Modeling and Experimental Validation, *J. Power Sources*, **158**, 213-224. [The presented model was developed for MCFCs based on mass and momentum conservation, electrochemical and chemical reaction mechanisms, and heat transfer].

Bove, R., Lunghi, P. and Sammes, N.M. (2005), SOFC Mathematic Model for Systems Simulations. Part One: from a Micro-detailed to Macro-black-box Model, *Int. J. Hydrogen Energy*, **30**, 184-187. [The article presents a review of the most significant SOFC. It is revealed that different results can be generated according to the assumptions made when adapting micro-model equations to a macro-model].

Chan, S.H. and Ding, O.L. (2005), Simulation of a Solid Oxide Fuel Cell Power System Fed by Methane, *Int. J. Hydrogen Energy*, **30**, 167-179, 2005. [A thermodynamic model was presented for a SOFC power system consisting of a stack, two heat exchangers, an afterburner, a vaporizer, a mixer and a steam boiler].

Cheddie, D. and Munroe, N. (2005), Review and Comparison of Approaches to Proton Exchange Membrane Fuel Cell Modeling, *J. Power Sources*, **147**, 72-84. [A review work on PEMFC models with focus on the solution strategy, i.e., so-called single- or multi-domain approach].

Comsol Chemical Engineering, COMSOL documentation, 2009. [A handbook how to use COMSOL software].

Damm, D.L., and Fedorov, A.G. (2005), Radiation Heat Transfer in SOFC Materials and Components, *J. Power Sources*, **143**, 158-165. [The paper reports the challenges and importance on thermal radiation transport within the electrode and electrolyte layers, and surface-to-surface radiation within the fuel and oxygen flow channels. On a larger scale, thermal radiation from the stack to the environment, including heat losses through insulation, was discussed].

Debangsu B. and Raghunathan R. (2009), A Review of Solid Oxide Fuel Cell (SOFC) Dynamic Models, *Ind. Eng. Chem. Res.*, **48**, 6068–6086. [The review outlined the transient models for SOFC systems with reformers, to capture the characteristic times identified. The first characteristic time is on the order of milliseconds and is mostly neglected. The second time constant is on the order of seconds mainly because of the mass-transport dynamics. The third characteristic time is on the order of minutes or hours based on the energy transport characteristics of the system.].

Djilali, N. and Lu, D. (2002), Influence of Heat Transfer on Gas and Water Transport in Fuel Cells, *Int. J. Therm. Sci.*, **41**, 29–40. [This paper presents modeling and analysis of various transport phenomena coupled by the reactions in a PEMFC, with a focus on the assessment of non-isothermal and non-isobaric effects that have been neglected].

Dutta, S., Shimpalee, S. and Zee, J.W.V. (2000), Three-Dimensional Numerical Simulation of Straight Channel PEM Fuel Cells, *J. Appl. Electroche.*, **30**, 135-146. [By a 3-D PEMFC CFD model, it is predicted that the membrane thickness and cell voltage have a significant effect on the axial distribution of the current density and net rate of water transport].

Faghri, A. and Guo Z. (2005), Challenges and Opportunities of Thermal Management Issues Related to Fuel Cell Technology and Modeling, *Int. J. Heat Mass Transfer*, **48**, 3891-3920. [This paper presented a detailed review on the heat transfer schemes and models in fuel cells and also outlined the existing models and unresolved issues in fuel cell modeling].

Ferguson, J.R., Fiard, J.M. and Herbin, R. (1996), Three-dimensional Numerical Simulation for Various Geometries of Solid Oxide Fuel Cells, *J. Power Sources*, **58**, 109-122. [The article presented almost the first 3-D SOFC model available in the open literature, which allows the computation of the local distributions of the electrical potential, temperature and concentration of the chemical species].

Godat, J. and Marechal, F. (2003), Optimization of a Fuel Cell System Using Process Integration Techniques, *J. Power Sources*, **118**, 411-423. [A fuel cell system studied was presented for a PEMFC and its fuel processing components based on a commercial software, to identify the optimal operating conditions and the optimal process structure of the system by applying modeling and process integration techniques].

Gundermann, M., Heidebrecht, P. and Sundmachery, K. (2008), Parameter Identification of a Dynamic MCFC Model Using a Full-Scale Fuel Cell Plant, *Ind. Eng. Chem. Res.*, **47**, 2728–2741. [A molten carbonate fuel cell (MCFC) model, being dynamic, spatially distributed for a cross-flow configuration of the gas channels, is applied for a system balancing, sensitivity analysis and stepwise optimization of single parameters and parameter groups].

Haberman, B.A. and Young, J.B. (2004), Three-dimensional Simulation of Chemically Reacting Gas Flows in the Porous Support Structure of an Integrated-planar Solid Oxide Fuel Cell, *Int. J. Heat Mass Transfer*, **47**, 3617-3629. [This paper describes a 3-D SOFC model to cover the transport processes in the porous medium and in the adjacent fuel supply channel. The results highlight the importance of the kinetics of the reforming reaction and the thermal boundary conditions].

Haraldsson, K. and Vipke, K. (2004), Evaluating PEM Fuel Cell System Models, *J. Power Sources*, **126**, 88–97. [The paper describes the PEMFC model selection criteria and advantages /disadvantages of available commercial models, followed by the two case studies].

He, W., Yi, J.S. and Nguyen, T.V. 2000, Two-phase Flow Model of the Cathode of PEM Fuel Cells Using Interdigitated Flow Fields, *AIChE Journal*, **46**, 2053–2064. [A 2-D, two-phase, multicomponent transport model was developed for PEMFCs for a interdigitated gas distributor design].

Hussain, M.M., Baschuk, J.J., Li, X. and Dincer, I. (2005), Thermodynamic Analysis of a PEM Fuel Cell Power System, *Int. J. Thermal Sci.*, **44**, 903-911. [A thermodynamic model was developed and applied for a PEMFC power system, including two major modules: PEMFC stack module and system module and a cooling pump].

Hwang, J. J., and Chen, P.Y., (2006), Heat/mass Transfer in Porous Electrodes of Fuel Cells, *Int. J. Heat Mass Transfer*, **49**, 2315-2327. [This paper presented a heat/mass coupled modeling to predict the transport phenomena inside the porous electrode of a fuel cell. The thermal energy equations based on the local thermal non-equilibrium (LTNE) were employed to resolve the temperature difference between the solid and fluid phases inside the porous electrode].

Kakaç, S, Pramuanjaroenkij, A. and Zhou, X.Y. (2007), A Review of Numerical Modeling of Solid Oxide Fuel Cells, *Int. J. Hydrogen Energy*, **32**, 761-786. [The article summarized the status of the SOFC models together with unresolved problems for various transport processes coupled by chemical reactions].

Kazim, A., Liu, H.T. & Forges, P. (1999), Modelling of Performance of PEM Fuel Cells with Conventional and Interdigitated Flow Fields, *J. Applied Electrochem.*, **29**, 1409–1416. [A mathematical model was developed for PEMFCs to investigate the superiority of the interdigitated flow field design over the conventional configuration].

Kee, R.J., Korada, P., Walters, K. and Pavol, M. (2002), A Generalized Model of the Flow Distribution in Channel Networks of Planar Fuel Cells, *J. Power Sources*, **109**, 148-159. [By formulating the problem in dimensionless variables, a generalized computational model was developed for various transport processes in the small channel network based on two nondimensional groups].

Khan, M.A. (2009), *Numerical Simulation of Multi-scale Transport Processes and Reactions in PEM Fuel Cells Using Two-Phase Models*, Thesis for the degree of Licentiate in Engn., Lund University, **ISSN 0282-1990**, Lund, Sweden. [This thesis presented a modeling work for various transport phenomena coupled by electrochemical reactions for PEMFCs, solved by Fluent software].

Koci, P., Nováka, V., Štěpánek, F., Marek, M. and Kubíček, M. (2010) Multi-scale Modelling of Reaction and Transport in Porous Catalysts, *Chem. Engn. Sci.*, **65**, 412 – 419. [Mathematical models of reaction and transport in porous catalyst components were presented on three different scales (nano, micro, and macro), with demonstrations for catalytic reformers].

Larminie, J. and Dicks, A. (2002), *Fuel Cell Systems Expained*, 2<sup>nd</sup> Ed., John Will & Sons Ltd., England. [This is a very useful and comprehensive book covering various and fundamental aspects of different kinds of fuel cells].

Lehnert, W., Meusinger, J. and Thom, F. (2000), Modelling of Gas Transport Phenomena in SOFC Anodes, *J. Power Sources*, **87**, 57–63. [Based on 1-D SOFC model, the paper highlights the importance to include the thermal models for internal steam reforming reaction, which may lead to inhomogeneous temperature distributions according to the fast reforming reaction kinetics].

Li, P.W., Schaefer, L. and Chyu, M.K. (2005), Multiple Transport Processes in Solid Oxide Fuel Cells, Book Chapter in *Transport Phenomena in Fuel Cells*, Sundén, B. & Faghri, M. (eds), 1-42, WIT Press, UK.

Lister, S. and Djilali, N. (2005), Two-phase Transport in Porous Gas Diffusion Electrodes, Book Chapter in *Transport Phenomena in Fuel Cells*, Sundén, B. & Faghri, M. (eds), WIT Press, 175-214. [This book chapter reviewed various analyses and models for the transport phenomena in the electrodes of PEMFC with focus on two-phase flow regimes in porous media, and a discussion of the driving forces and the various flow regimes.].

Liu, H., Yuan, J. and Sundén, B. (2008), Thermal Radiation and Effects on Transport Processes in Solid Oxide Fuel Cells, *Heat Transfer Research*, **39**, 453-467. [The paper is a review of thermal radiation and effects on heat transfer and gas flow modeling developments in the SOFCs. Different models are compared in terms of cell designs, flow regimes, thermal sources considered, boundary conditions used, and whether the participating gases were concerned in the models].

Meng, H. and Wang, C. (2004), Electron Transport in PEFCs, *J. Electrochem. Soc.*, **151**, A358-367. [A 3-D model was developed for single-phase and isothermal PEMFCs to investigate effects of electron transport through the gas diffusion layer on other transport phenomena and cell performance].

Mohamed, I. and Jenkins, N. (2004), Proton Exchange Membrane (PEM) Fuel Cell Stack Configuration Using Genetic Algorithms, *J. Power Sources*, **131**, 142-146. [This paper presents a genetic model applied to optimise a PEMFC stack design by searching for the best configuration in terms of number of cells and cell surface area].

Mostinsky, I.L. (1996), Diffusion coefficient, in: *International Encyclopedia of Heat & Mass Transfer*, Hewitt, G.F., Shires, G.L. and Polezhaev, Y.V. (eds.), CRC Press, Florida, USA. [This is a book chapter focusing on various issues connecting to diffusion and diffusion coefficient].

Murthy, S. and Fedorov, A. (2003), Heat Transfer Analysis of the Monolith Type Solid Oxide Fuel Cell, *J. Power Sources*, **124**, 453-458. [In this paper, a CFD modeling framework for heat and mass transport was established for a unit monolith type SOFC, with emphasis on evaluation of the radiation heat transfer effects. The problems were solved by Fluent software].

Nguyen, T.V. (2000), Modeling Two-Phase Flow in the Porous Electrodes of Proton Exchange Membrane Fuel Cells Using the Interdigitated Flow Fields, *Proc. Electrochem. Soc.*, **99-14**, 222–241. [This conference paper outlined the modeling approach of two-phase transport processes in PEMFC interdigitated designed cathod].

Omosun, A.O., Bauen, A., Brandon, N.P., Adjiman, C.S. and Hart, D. (2004), Modelling System Efficiencies and Costs of Two Biomass-fueled SOFC System, *J. Power Sources*, **131**, 96-106. [This paper deals with integration of a SOFC with biomass gasification for a combined heat and power system, by a steady-state model developed in the gPROMS].

Okada, T., Xie, G. and Meeg, M. (1998), Simulation for Water Management in Membranes for Polymer Electrolyte Fuel Cells, *Electrochem. Acta*, **43**, 2141–2155. [Water management in membranes for PEMFCs is analytically solved by using a linear transport equation covering the diffusion of water and the electroosmotic drag, based on the experimental data of the membrane parameters as the input].

Palsson, J., Selimovic, A., and Sjunnesson, L. (2000), Combined Solid Oxide Fuel Cell and Gas Turbine Systems for Efficient Power and Heat Generation, *J. Power Sources*, **86**, 442-448. [A SOFC model was developed to balance the local heat and mass transfer, and integrated into Aspen Plus™ to simulate a system with external pre-reforming and anode gas recirculation for the internal supply of steam].

Peighambardoust, S., Rowshanzamir, S, Amjadi, M. (2010), Review of the proton exchange membranes for fuel cell applications, *Int. J. Hydrogen Energy*, **35**, 9349-9384. [This paper outlined key requirements for the proton exchange membrane materials used in fuel cell applications, and reviewed new candidates to develop ‘water-free’ electrolytes that do not require hydration and to be operated under high temperature].

Shimpalee, S. and Dutta, S. (2000), Numerical Prediction of Temperature Distribution in PEM Fuel Cells, *Num. Heat Transfer (Part A)*, **38**, 111–128. [A CFD model was presented to simulate and predict the temperature distribution in PMMFCs].



Singh, D., Lu, D.M. and Djilali, N. (1999), A Two-Dimensional Analysis of Mass Transport in Proton Exchange Membrane Fuel Cells, *Int. J. Eng. Sci.*, **37**, 431–442. [In this paper, a model was developed to simulate transport phenomena in a PEMFC, to assess two-dimensional effects neglected in their previous studies.].

Suzuki, K., Iwai, H. and Nishino, T. (2005), Electrochemical and Thermo-Fluid Modeling of a Tubular Solid Oxide Fuel Cell with Accompanying Indirect Internal Fuel Reforming, Book Chapter in *Transport Phenomena in Fuel Cells*, Sundén, B. & Faghri, M. (eds), 83-131, WIT Press, UK. [This book chapter presented a CFD model for an internal reforming type tubular SOFC, velocity field, heat and mass transfer in and around a tubular cell are simulated for a two-dimensional cylindrical coordinate system].

Um, S., Wang, C.Y. and Chen, K.S. (2000), Computational Fluid Dynamics Modeling of Proton Exchange Membrane Fuel Cells, *J. Electrochem. Soc.*, **147**, 4485–4493. [The CFD PEMFC model developed in this study accounts simultaneously for electrochemical kinetics, current distribution, hydrodynamics, and heat/mass transport, based on a single set of conservation equations valid for all the domains using a finite-volume- technique.].

Versteeg, H.K. and Malalasekera, W. (2007), *An Introduction to Computational Fluid Dynamics – the Finite Volume Method*, 2<sup>nd</sup> ed., Longman Group Ltd, England. [This is a fundamental and comprehensive book covering all the aspects of CFD modeling of fluid flow and heat/mass transfer, based on finite volume method].

Vogler, M., Bieberle-Hütter, A., Gauckler, L, Warnatz, J. and Bessler, W.J. (2009), Modelling Study of Surface Reactions, Diffusion, and Spillover at a Ni/YSZ Patterned Anode, *J. Electrochem. Soc.*, **156**, B663-B672. [This paper presented a microscopic model of the electrochemical hydrogen oxidation reaction at Ni/YSZ patterned SOFC anodes, by accounting for coupled heterogeneous chemistry and transport processes on the Ni and YSZ surfaces].

Voss, H.H., Wilkinson, D.P., Pickup, P.G., Johnson, M.C. and Basura, V. (1995), Anode Water Removal: a Water Management and Diagnostic Technique for Solid Polymer Fuel Cells, *Electrochimica Acta*, **40**, 321–328. [A water management technique was developed in this study for PEMFCs to remove a substantial proportion of the water in the cathode via the anode fuel stream].

Wang, C.Y. (2004), Fundamental Models for Fuel Cell Engineering, *Chem. Rev.*, **104**, 4727-4766. [This article critically reviewed various CFD approaches to simulate transport processes and reactions in fuel cells, such as PEMFCs and SOFCs].

Wang, Z.H., Wang, C.Y. and Chen, K.S. (2001), Two-Phase Flow and Transport in the Air Cathode of Proton Exchange Membrane Fuel Cells, *J. Power Sources*, **94**, 40–50. [Two-phase flow and transport in the air cathode of PEMFCs is studied analytically and numerically (by a multicomponent mixture CFD model)].

Xiao, Y., Yuan, J, and Sundén, B. (2010), Review on the Properties of Nano-/micro- Structures in the Catalyst Layer of PEMFC, *ASME J. Fuel Cell Sci., Tech. and Engn.*, (in press). [In this paper, the properties of nano-/micro-structured catalyst particles are outlined for PEMFC catalyst layers, followed by a review on the modeling of the nanocomposites for investigating the structural evolution and the interactions between Pt/C particles and polymer components; while the micro-scale simulations approaches are discussed in terms of the morphology and reconstruction of heterogeneous materials and their effective properties.].

Yan, Q., and Wu, J. (2008), Modeling of Single Catalyst Particle in Cathode of PEM Fuel Cells, *Energy Conversion and Management*, **49**, 2425-2433. [A microscopic catalyst model was developed to predict the local mass diffusion of a single catalyst particle in the PEMFC cathode catalyst layer, for the objective to obtain a geometric description of the active layer].

Yan, V.M., Chen, F., Wu, H.Y., Soong, C.Y. and Chu, H.S. (2004), Analysis of Thermal and Water Management with Temperature-dependent Diffusion Effects in Membrane of Proton Exchange Membrane Fuel Cells, *J. Power Sources*, **129**, 127-137. [In this study, the detailed thermal and water management in the membrane of PEMFCs is modeled to couple the effects of mass diffusion and temperature gradient on the water distribution in the membrane based on the temperature-dependent diffusivity].

Yao, K.Z., Karan, K., McAuley, K.B., Oosthuizen, P., Peppley, B. and Xie, T. (2004), A Review of Mathematical Models for Hydrogen and Direct Methanol Polymer Electrolyte Membrane, *Fuel Cells*, **4**, 3-29. [This paper reviewed the mathematical modeling of single PEMFC and DMFC cells and entire stacks].

You, L. and Liu, H. (2001), A Two-phase and Multi-Component Model for the Cathode of PEM Fuel Cells, *Proceedings of ASME IMECE2001/HTD-24273*, 1–10. [A two-phase flow and multi-component transport processes of a PEMFC was modeled to couple the flows, species, electrical potential, and current density distributions].

Yuan, J., Faghri, M. and Sundén, B. (2005), On Heat and Mass Transfer Phenomena in PEMFC and SOFC and Modeling Approaches, Book Chapter in *Transport Phenomena in Fuel Cells*, Sundén, B. & Faghri, M. (eds), 133-174, WIT Press, UK. [The book chapter presented modeling and numerical analysis of heat, mass transfer/species flow, two-phase transport and effects on the cell performance in SOFCs and PEMFCs, in terms of convective heat transfer and pressure drop in flow ducts. The unique boundary conditions (thermal, mass) for the flow ducts in fuel cells were implemented].

Yuan, J., Huang, Y., Sundén, B. and Wang, W.G. (2009), CFD Approach to Analyze Parameter Effects on Chemical-Reacting Transport Phenomena in SOFC Anodes, *Heat and Mass Transfer*, **45**, 471-484. [By an in-house code, the effects of internal reforming reactions on the heat transfer and other processes were simulated and analysed for SOFC anodes].

Yuan, J., Rokni, M. and Sundén, B. (2001), Simulation of Fully Developed Laminar Heat and Mass Transfer in Fuel Cell Ducts with Different Cross Sections, *Int. J. Heat Mass Transfer*, **44**, 4047–4058. [The fully developed laminar flow and heat transfer for fuel cell channels with rectangular and trapezoidal cross-sections was simulated by an in-house CFD code with a uniform mass injection/suction and heat flux to the porous wall, the other three walls being impermeable and thermal isolated].

Yuan, J., Rokni, M. and Sundén, B. (2003), Three-Dimensional Computational Analysis of Gas and Heat Transport Phenomena in Ducts Relevant for Anode-Supported Solid Oxide Fuel Cells, *Int. J. Heat Mass Transfer*, **46**, 809–821. [In terms of heat transfer coefficient and friction factor, various transport phenomena occurring in an anode duct of ITSOFC have been simulated and analyzed by a fully three-dimensional CFD code].

Yuan, J. and Sundén, B. (2005), Analysis of Intermediate Temperature Solid Oxide Fuel Cell Transport Processes and Performance, *ASME J. Heat Transfer*, **27**, 1380-1390. [Various transport phenomena occurring in an anode duct of an ITSOFC have been analyzed by a 3-D CFD model. In addition, a general model to evaluate the stack performance was presented for the purpose of optimal design and/or configuration based on specified electrical power or fuel supply rate].

Yuan, J. and Sundén, B. (2006), Analysis of Chemically Reacting Transport Phenomena in an Anode Duct of Intermediate Temperature SOFCs, *ASME J. Fuel Cell Sci., Tech. and Engn.*, **3**, 89-98. [In this study, an in-house code was developed to simulate and analyze chemically reacting transport processes in a thick SOFC anode consisting of a porous anode, the fuel flow duct and solid current connector. Furthermore, the heat transfer due to the fuel gas diffusion is implemented into the energy balance based on multicomponent diffusion models].

Zhou, T. and Liu, H. (2004), A 3D Model for PEM Fuel Cells Operated on Reformate, *J. Power Sources*, **138**, 101-110. [A 3-D CFD model for PEMFCs operated on reformate was developed by incorporating the adsorption and oxidation kinetics of CO on platinum surface].

### Biographical Sketch

**Dr. Yuan** works as a senior researcher and the project leader for heat transfer and transport phenomena in energy systems and a supervisor for PhD students at the Department of Energy Sciences, Lund University, Sweden.

Jinliang received his LicEngn Degree in February 2001 and presented his PhD degree thesis in February 2003. He was promoted as Docent (an honorary degree in Sweden) in April 2006. Dr Yuan is a visiting professor for several universities and a research institute in both Sweden and China.

Supported by the external funding agencies, his current research work concerns comprehensive understanding of catalytically chemical reaction mechanisms and multi-functional material structure effects on various transport processes in components of fuel cell systems, in terms of micro-/nano-structures and configurations, water/thermal/mass balance and integration, and overall fuel cell/stack performance as well. The research is approached by theoretical and numerical analysis validated by experimental data. The computer codes have been further developed and applied for the research projects; commercial software has been applied to estimate the heat amount being exchanged in fuel cell systems, in terms of heat transfer rate requirement by considering the effects from compressors, humidifier and PEMFC stack operating conditions; The research is of fundamental as well as of applied character, and has links to overall fuel cell modeling/design system analysis, as well as other investigations considering reacting transport processes in real-world industrial applications.

Jinliang has been very active in formulating project proposals, and several projects have been granted by agencies. Dr Yuan has established a good network with industry and universities, and is now strongly involved in international collaboration both concerning projects and as reviewer of papers for journals and conferences. He serves also for an international journal as in the editorial board, and has delivered several invited lectures and keynote presentations internationally. As a teacher/adviser, he has been involved in several courses for undergraduates and PhD students both in China and Sweden. More than 100 papers of various kinds have been extensively published in international journals or conference proceedings.